


Cod. 31INOX

ESPULSORI IN ACCIAIO INOSSIDABILE PER STAMPI

Materiale: 1.4112 18% Cr
 Corpo 56/58 HRc
 Testa ~ 45 HRc
 Esempio di ordinazione : D * L

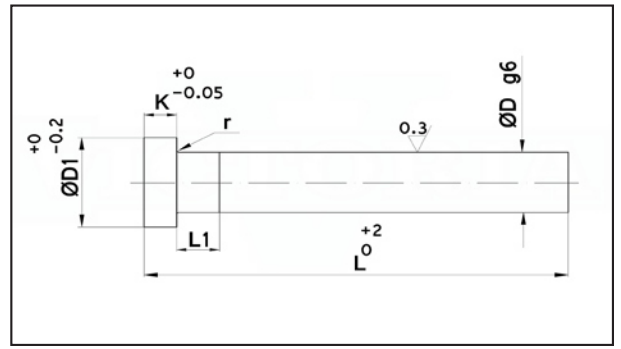

D	D1	k	r	L L1	100	125	160	200	250	315
1	2.5	1.2	0.2	5	•	•				
1.5	3	1.5	0.2	5					•	
2	4	2	0.2	5	•	•	•	•		
2.5	5	2	0.3	5	•	•	•	•	•	
2.7	5	2	0.3	5				•		
3	6	3	0.3	5	•	•	•	•	•	
3.5	7	3	0.3	5	•	•	•	•	•	
4	8	3	0.3	5	•	•	•	•	•	
4.5	8	3	0.3	5	•	•	•	•	•	
5	10	3	0.3	5	•	•	•	•	•	
5.5	10	3	0.3	5	•	•	•	•	•	
6	12	5	0.5	6	•	•	•	•	•	
6.5	12	5	0.5	6					•	
7	12	5	0.5	6					•	
8	14	5	0.5	8	•	•	•	•	•	•
10	16	5	0.5	10	•	•	•	•	•	
12	18	7	0.8	12	•	•	•	•	•	

5