


| D | L | D1 | D2 | L1 | L2 | K | |
|---------|-----|----|----|-----|-----|----|---|
| 30 - 32 | 136 | 42 | 47 | 96 | 123 | 6 | • |
| 30 - 32 | 156 | 42 | 47 | 96 | 143 | 6 | • |
| 30 - 32 | 176 | 42 | 47 | 96 | 163 | 6 | • |
| 30 - 32 | 196 | 42 | 47 | 96 | 183 | 6 | • |
| 40 - 42 | 46 | 54 | 49 | 46 | 28 | 10 | • |
| 40 - 42 | 56 | 54 | 49 | 56 | 38 | 10 | • |
| 40 - 42 | 66 | 54 | 49 | 66 | 48 | 10 | • |
| 40 - 42 | 76 | 54 | 49 | 76 | 58 | 10 | • |
| 40 - 42 | 86 | 54 | 49 | 86 | 68 | 10 | • |
| 40 - 42 | 96 | 54 | 49 | 96 | 78 | 10 | • |
| 40 - 42 | 116 | 54 | 49 | 116 | 98 | 10 | • |
| 40 - 42 | 136 | 54 | 49 | 116 | 118 | 10 | • |
| 40 - 42 | 156 | 54 | 49 | 116 | 138 | 10 | • |
| 40 - 42 | 176 | 54 | 49 | 116 | 158 | 10 | • |
| 40 - 42 | 196 | 54 | 49 | 116 | 178 | 10 | • |
| 40 - 42 | 246 | 54 | 49 | 116 | 198 | 10 | • |

Cod. 53S
BUSSE CON COLLARE SPALLATE PER STAMPI

Materiale: acciaio UNI 16CrNi4.
Trattamento termico: cementazione e tempra.
Durezza: 60 ÷ 62 HRC.
Esecuzione: rettifica.
Concentricità: 0.005 mm.
Esempio di ordinazione: D * L

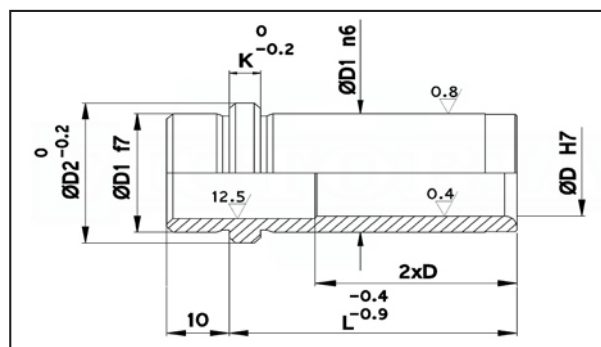

| D | D1 | D2 | L | 22 | 26 | 36 | 46 | 56 | 66 | 76 | 86 | 96 | 106 | 116 | 126 | 146 |
|----|----|----|---|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|
| 16 | 22 | 26 | 5 | • | • | • | • | • | • | • | • | • | | | | |
| 20 | 28 | 32 | 6 | | • | • | • | • | • | • | • | • | | | | |
| 25 | 34 | 38 | 7 | | • | • | • | • | • | • | • | • | | | | |
| 32 | 40 | 45 | 7 | | | • | • | • | • | • | • | • | • | • | • | • |
| 40 | 48 | 52 | 8 | | | | • | • | • | • | • | • | • | • | • | • |