


Cod. **739L**

DEFLETTORE RAFFREDDAMENTO PER STAMPI

Materiale: Ottone

Esempio di ordinazione : D * L

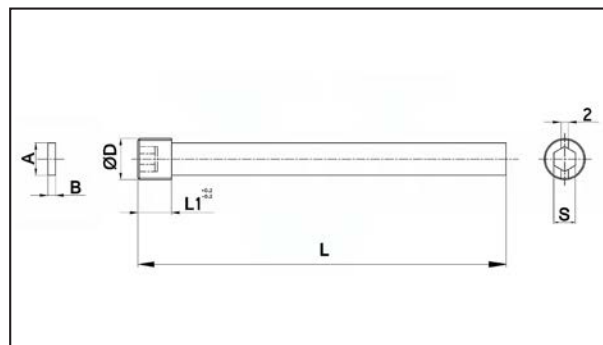

D	A	L1	B	S	L Diametro foro raffreddamento	100	125	150	200	250	300	400	500
M8	6.2	8	2	4	6.5	•			•				
M10	8.2	8	2	5	8.5	•			•				
M12	10.2	10	2	6	10.5	•			•				
M14	11.2	12	2	6	11.5				•				
1/8"	8.2	8	1.6	5	8.5	•			•				
1/4"	11.2	10	2.4	7	11.5		•			•			
3/8"	14.7	10	2.4	8	15			•			•		
3/4"	23.2	12	3.2	12	23.5						•	•	
1/2"	18.2	10	2.4	10	18.5				•			•	



Cod. **739PF**

LAME DI DEVIAZIONE IN MATERIALE PLASTICO CON FILETTO PER STAMPI

Materiale: OTTONE 2.0401, PA66GF

Temperatura Max: 150°C

Esempio di ordinazione : D1

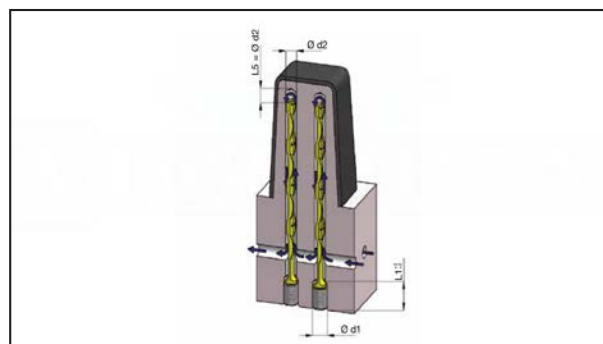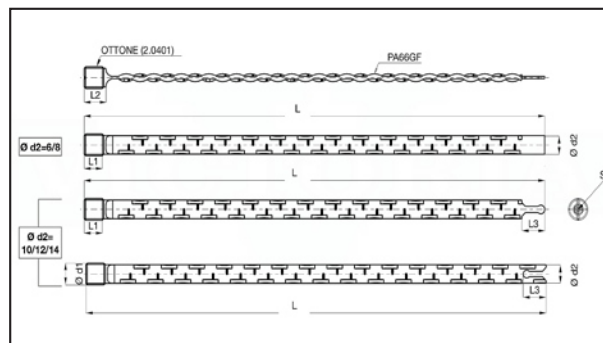

D1	Passo	L	L1	L2	L3	S	D2	
M8	0.75	331	10.5	11.7	F	4	6	•
M10	1	331	11.5	12.8	F	5	8	•
M12	1.5	333	12	13.7	16.5	6	10	•
M14	1.5	333	14	15.8	16.5	6	12	•
G1/8"	F	331	11.5	12.8	F	5	8	•
G1/4"	F	333	14	15.8	16.5	6	12	•
G3/8"	F	333	15	17.1	16.5	6	14	•